

PAPER • OPEN ACCESS

Coupling between guided modes of two parallel nanofibers

To cite this article: Fam Le Kien *et al* 2020 *New J. Phys.* **22** 123007

View the [article online](#) for updates and enhancements.



PAPER

Coupling between guided modes of two parallel nanofibers

OPEN ACCESS

RECEIVED
22 July 2020REVISED
3 November 2020ACCEPTED FOR PUBLICATION
9 November 2020PUBLISHED
7 December 2020

Original content from
this work may be used
under the terms of the
[Creative Commons
Attribution 4.0 licence](#).

Any further distribution
of this work must
maintain attribution to
the author(s) and the
title of the work, journal
citation and DOI.



Fam Le Kien* , Lewis Ruks, Síle Nic Chormaic and Thomas Busch

Okinawa Institute of Science and Technology Graduate University, Onna, Okinawa 904-0495, Japan

* Author to whom any correspondence should be addressed.

E-mail: kienle.pham@oist.jp

Keywords: guided modes, nanofibers, mode coupling

Abstract

We study the coupling between the fundamental guided modes of two identical parallel nanofibers analytically and numerically. We calculate the coefficients of directional coupling, butt coupling, and self coupling as functions of the fiber radius, the light wavelength, and the fiber separation distance. We show that, due to the symmetry of the system, a mode of a nanofiber with the principal quasilinear polarization aligned along the axis joining the nanofibers or the perpendicular axis is coupled only to the mode with the same corresponding principal polarization of the other nanofiber. We find that the effects of the butt coupling and the self coupling on the power transfer are significant when the fiber radius is small, the light wavelength is large, or the fiber separation distance is small. We show that the power transfer coefficient may achieve a local maximum or become zero as the fiber radius, the light wavelength, or the fiber separation distance varies.

1. Introduction

Optical nanofibers are vacuum-clad, ultrathin optical fibers [1] that allow tightly radially confined light to propagate over a long distance (the range of several millimeters is typical) and to interact efficiently with nearby atoms, molecules, quantum dots, or nanoparticles [2–4]. Optical nanofibers have been widely studied for various applications ranging from nonlinear optics to nanophotonics, quantum optics, and quantum photonics [1–5]. Some uses of optical nanofibers include couplers for whispering gallery resonators [6, 7], miniature Mach–Zehnder interferometers [8], sensors [9, 10], particle manipulation [11], generation of atom traps [12–15], channeling of light from quantum emitters into nanofiber-guided modes [16–20], scattering of nanofiber-guided light by atoms [21, 22], use of nanofiber-guided light for Rydberg atom generation [23], and quadrupole excitations [24, 25].

The mutual interaction between two copropagating light fields in the guided modes of two parallel waveguides is very important for the construction of practical optical devices [26–29]. Photonic structures composed of coupled micro- and nanofibers have been proposed, fabricated, and investigated [30–35]. Such structures have been used to build miniaturized ring interferometers and knot resonators in the visible light wavelength range in recent work by Ding *et al* [35]. They used the linear coupling theory [26–29, 36–44] to calculate the directional coupling coefficient for different fiber radii and different polarization angles. However, as in almost all work related to coupling of optical fibers, the coefficients for butt coupling and self coupling [26–28] have been omitted despite the fact that these effects could be quite significant and can lead to dramatically different results in the case of nanofibers due to the significant spatial spread and overlap of the modes.

The purpose of this paper is to present a systematic and complete treatment for the coupling between the fundamental guided modes of two identical parallel nanofibers. Using coupled mode theory, we show that the effects of the butt coupling and the self coupling on the power transfer are significant when the fiber radius is small, the light wavelength is large, or the fiber separation distance is small.

The paper is organized as follows. In section 2 we describe the model and present the basic coupled mode equations. Section 3 is devoted to the calculations of the coupling coefficients for the modes with the

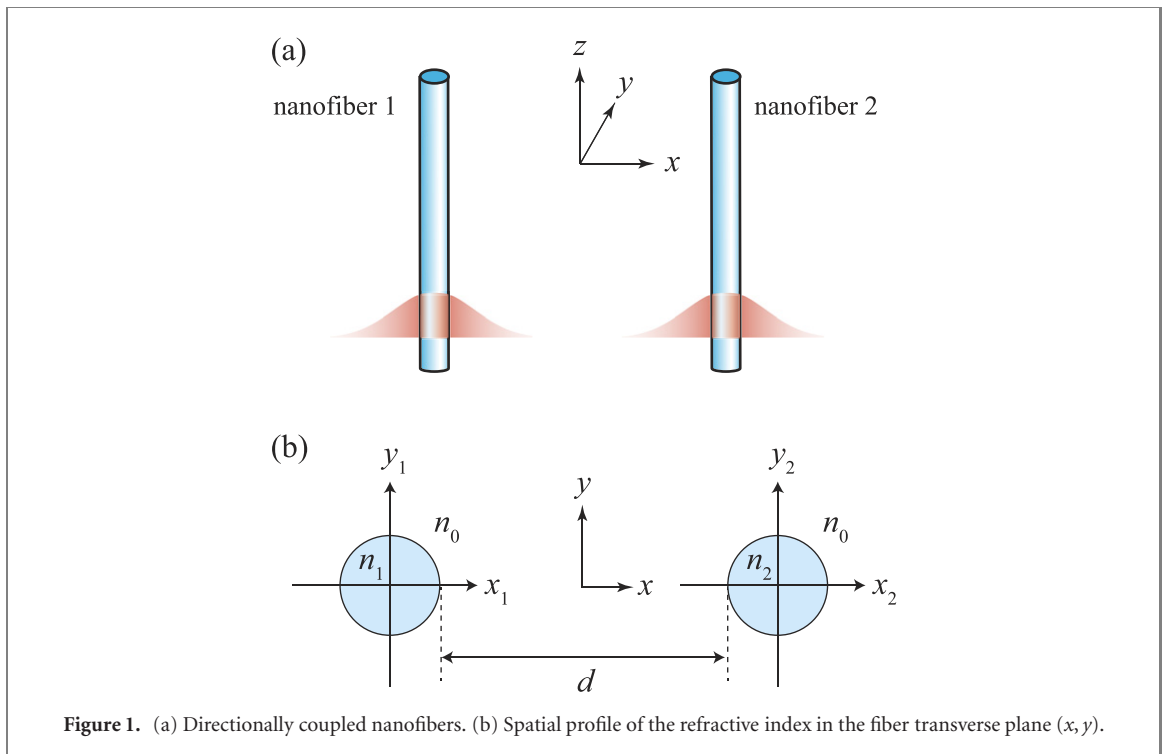


Figure 1. (a) Directionally coupled nanofibers. (b) Spatial profile of the refractive index in the fiber transverse plane (x, y) .

principal quasilinear polarizations. In section 4, we present the results of calculations for the power transfer and phase shift coefficients. Our conclusions are given in section 5.

2. Two coupled parallel nanofibers and basic mode coupling equations

We consider two identical vacuum-clad, ultrathin optical fibers aligned parallel to each other as shown in figure 1. We label the fibers by the indices $j = 1, 2$. Each fiber j is a dielectric cylinder of radius a and refractive index $n_1 = n_2 > 1$ and is surrounded by an infinite background vacuum or air medium of refractive index $n_0 = 1$. We are interested in vacuum-clad, silica-core fibers with diameters in the range of hundreds of nanometers. Such ultrathin optical fibers are usually called nanofibers [1–4]. They can support one or more modes depending on the fiber size parameter $V = ka\sqrt{n_j^2 - n_0^2}$, where k is the free-space wave number of light. For $V < V_{\text{cutoff}}$ where $V_{\text{cutoff}} \simeq 2.405$ is the cutoff parameter, the fiber can support only the fundamental mode HE_{11} , while for $V > V_{\text{cutoff}}$, the fiber can support not only the fundamental mode but also higher-order modes [1, 26–28, 45, 46].

We use the global Cartesian coordinate system $\{x, y, z\}$, where the axis z is parallel to the fiber axes z_1 and z_2 , the axis x is perpendicular to the axis z and connects the fiber centers, and the axis y is perpendicular to the axes x and z (see figure 1). The cross-sectional plane of the fibers is the plane xy . We call the axes x and y the radial (horizontal) and tangential (vertical) axes, respectively, of the coupled fiber system (see figure 1(b)). The corresponding polar coordinate system is denoted as $\{r, \varphi\}$. Without loss of generality, we assume that the fiber axes z_1 and z_2 are positioned symmetrically at the points $x = \pm(a + d/2)$ on the axis x , where d is the separation distance between the fibers. For each individual fiber j , we use the local fiber-based Cartesian coordinate system $\{x_j, y_j, z_j\}$, where the origin is at the center of the respective fiber, the axis x_j is aligned along x , and the axis y_j is parallel to y (see figure 1(b)). We also use the corresponding local polar coordinate systems $\{r_j, \varphi_j\}$.

We study the coupling between two copropagating guided light fields of the same optical frequency ω in the fundamental modes HE_{11} of the nanofibers. Without loss of generality, we assume that these guided fields propagate in the forward direction $+z$. Since the phase mismatch between counterpropagating modes is large, the coupling between them is weak and hence is neglected [26–28]. For the same reason, we neglect the coupling between guided modes and radiation modes [26–28].

The guided field in each nanofiber before mode coupling can be decomposed into a superposition of the orthogonal fundamental modes with the orthogonal polarizations p_1 and p_2 . Let $\mathbf{E}_j^{(p)}$ and $\mathbf{H}_j^{(p)}$ be the positive frequency parts of the electric and magnetic components of the fundamental mode HE_{11} with the polarization $p = p_1, p_2$ of nanofiber $j = 1, 2$ before mode coupling [26–28]. As the main approximation in

the coupled mode theory, we assume that the field vector (\mathbf{E}, \mathbf{H}) of the coupled nanofibers can be expressed as a superposition of the field vectors $(\mathbf{E}_j^{(p)}, \mathbf{H}_j^{(p)})$ of the fundamental modes of the individual fibers, that is,

$$\mathbf{E} = \sum_{jp} A_j^{(p)} \mathbf{E}_j^{(p)}, \quad \mathbf{H} = \sum_{jp} A_j^{(p)} \mathbf{H}_j^{(p)}. \quad (1)$$

Here, $A_j^{(p)}$ are z -dependent coefficients. We separate the transverse and axial dependencies of $\mathbf{E}_j^{(p)}$ and $\mathbf{H}_j^{(p)}$ as $\mathbf{E}_j^{(p)} = \mathcal{E}_j^{(p)}(x, y)e^{i\beta z}$ and $\mathbf{H}_j^{(p)} = \mathcal{H}_j^{(p)}(x, y)e^{i\beta z}$, where β is the longitudinal propagation constant of the fundamental guided modes of the individual fibers and $\mathcal{E}_j^{(p)}$ and $\mathcal{H}_j^{(p)}$ are the envelopes of the electric and magnetic parts of the p -polarized forward fundamental mode of fiber j before mode coupling [26–28]. The amplitudes $A_j^{(p)}$ are governed by the equations [26–28]

$$\frac{dA_j^{(p)}}{dz} + \sum_{p'} c_{jj'}^{(pp')} \frac{dA_j^{(p')}}{dz} - i \sum_{p'} \chi_j^{(pp')} A_j^{(p')} - i \sum_{p'} \kappa_{jj'}^{(pp')} A_j^{(p')} = 0, \quad (2)$$

where $j' \neq j$, that is, $(j, j') = (1, 2)$ or $(2, 1)$, and

$$\begin{aligned} \kappa_{jj'}^{(pp')} &= \frac{\omega \epsilon_0 \int d\mathbf{r} (N^2 - N_j^2) (\mathcal{E}_j^{(p)*} \cdot \mathcal{E}_j^{(p')})}{2 \int d\mathbf{r} \operatorname{Re}[\mathcal{E}_j^{(p)*} \times \mathcal{H}_j^{(p)}]_z}, \\ c_{jj'}^{(pp')} &= \frac{\int d\mathbf{r} \{ [\mathcal{E}_j^{(p)*} \times \mathcal{H}_j^{(p')}]_z + [\mathcal{E}_j^{(p')} \times \mathcal{H}_j^{(p)*}]_z \}}{2 \int d\mathbf{r} \operatorname{Re}[\mathcal{E}_j^{(p)*} \times \mathcal{H}_j^{(p)}]_z}, \\ \chi_j^{(pp')} &= \frac{\omega \epsilon_0 \int d\mathbf{r} (N^2 - N_j^2) (\mathcal{E}_j^{(p)*} \cdot \mathcal{E}_j^{(p')})}{2 \int d\mathbf{r} \operatorname{Re}[\mathcal{E}_j^{(p)*} \times \mathcal{H}_j^{(p)}]_z} \end{aligned} \quad (3)$$

are the mode coupling coefficients. Here, N_j is the refractive-index distribution of the space in the presence of fiber j alone, N is the refractive-index distribution of the space in the presence of the coupled fibers 1 and 2, and $\int d\mathbf{r} = \int_{-\infty}^{\infty} \int_{-\infty}^{\infty} dx dy$ is the integral over the fiber transverse plane. Note that the integrals in the numerators of the expressions for $\kappa_{jj'}^{(pp')}$ and $\chi_j^{(pp')}$ are carried out in the cross-sectional areas of fibers j and j' , respectively, where the factors $N^2 - N_j^2$ and $N^2 - N_j^2$ are not zero, respectively. Meanwhile, the integral in the numerator of the expression for $c_{jj'}^{(pp')}$ is carried out in the full transverse plane xy . The integral that is present in all of the denominators is twice the power and is also carried out in the full transverse plane xy . The coefficients $\kappa_{jj'}^{(pp')}$ are the mode coupling coefficients of the directional coupler [26–28]. The coefficients $c_{jj'}^{(pp')}$ represent the butt coupling (cross-power coupling) of the waveguides [28]. The coefficients $\chi_j^{(pp')}$ characterize the self coupling resulting from the changes of the electromagnetic energies of the modes of fiber j induced by the presence of the other perturbing fiber. We note that the directional coupling coefficients $\kappa_{jj'}^{(pp')}$ and the self-coupling (mode-energy-change) coefficients $\chi_j^{(pp')}$ have the dimension of inverse length, while the butt coupling coefficients $c_{jj'}^{(pp')}$ are dimensionless. The characteristic lengths $1/\kappa_{jj'}^{(pp')}$ and $1/\chi_j^{(pp')}$ determine the propagation distances required for the directional coupling and the self coupling to be substantial. The dimensionless coefficients $c_{jj'}^{(pp')}$ characterize the efficiency of the butt coupling.

While butt coupling is usually interpreted as a direct light field transfer in a structure composed of two end-to-end joined fibers, where light exiting from a transmitting fiber is coupled to a receiving fiber, it can also occur in directional couplers [28]. In the case of directional couplers, butt coupling means that a gradient of the envelope of the field of a fiber can excite the field of the other fiber and should not be ignored.

The set of the coefficients $\chi_j^{(pp')}$ describes not only the shifts of the energies and propagation constants of the modes ($p = p'$) of fiber j but also the coupling between the different modes ($p \neq p'$) of the fiber. This leads to splitting of the degenerate mode energies and propagation constants and also to mode mixing. Note that $\chi_j^{(pp')} = \kappa_{jj}^{(pp')}$.

When the single-fiber modes p and p' are normalized to have the same power, the coefficients $c_{jj'}^{(pp')}$ and $\chi_j^{(pp')}$ satisfy the Hermitian conjugate relationship, that is, $c_{jj'}^{(pp')} = c_{j'j}^{(p'p)*}$ and $\chi_j^{(pp')} = \chi_j^{(p'p)*}$. Meanwhile, the coefficients $\kappa_{jj'}^{(pp')}$ in general do not satisfy this relationship unless the waveguides are identical [26–28].

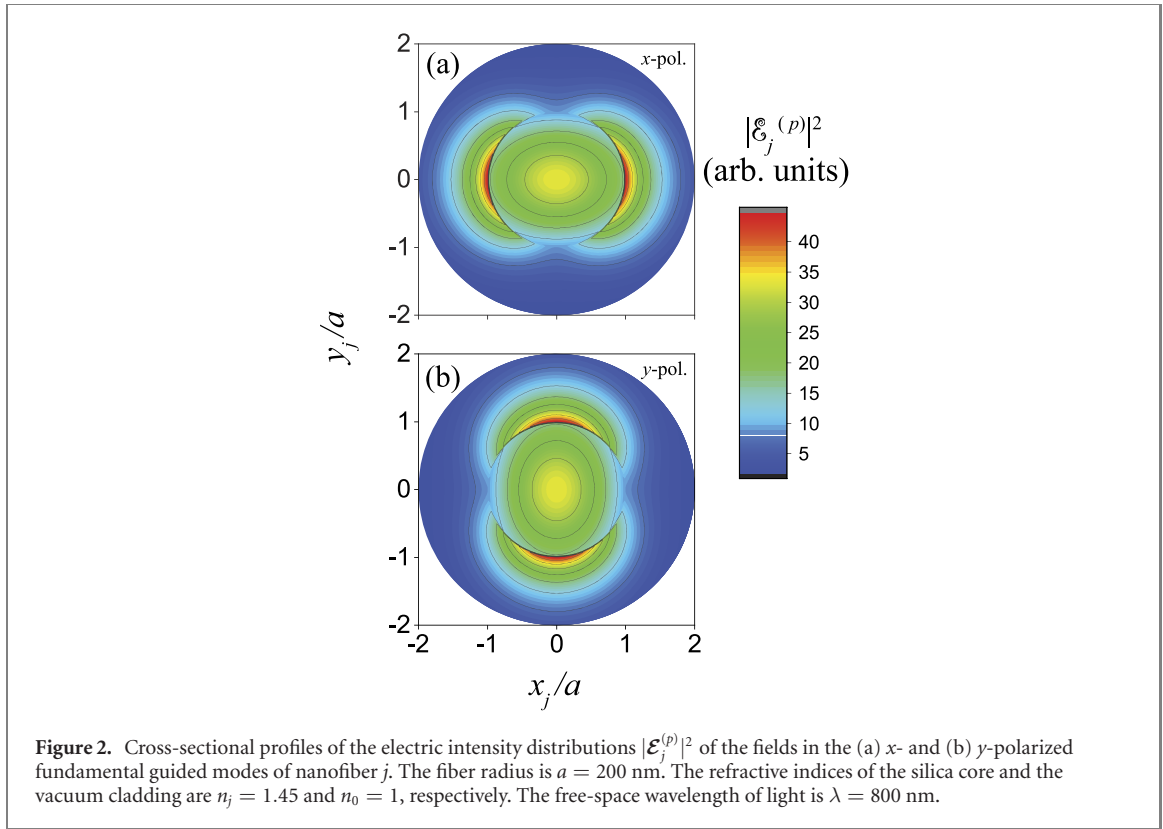


Figure 2. Cross-sectional profiles of the electric intensity distributions $|\mathcal{E}_j^{(p)}|^2$ of the fields in the (a) x - and (b) y -polarized fundamental guided modes of nanofiber j . The fiber radius is $a = 200$ nm. The refractive indices of the silica core and the vacuum cladding are $n_j = 1.45$ and $n_0 = 1$, respectively. The free-space wavelength of light is $\lambda = 800$ nm.

We will show in the next section that, in the case of identical nanofibers as considered in this paper, the coefficients $\kappa_{jj'}^{(pp')}$ satisfy the Hermitian conjugate relationship, that is, $\kappa_{jj'}^{(pp')} = \kappa_{jj'}^{(p'p)*}$ [26–28].

The eigenvectors of the coupled differential equations (2) represent the normal modes of the coupled fibers [26–28]. The eigenvalues are the corrections to the propagation constants of the normal modes. It is clear that the whole set of the coupling coefficients $\kappa_{jj'}^{(pp')}$, $c_{jj'}^{(pp')}$, and $\chi_j^{(pp')}$ determines the normal modes and their propagation constants.

The sets of the orthogonal modes with the polarization indices p_1 and p_2 of each nanofiber $j = 1, 2$ can, in principle, be arbitrary. Equations (2) and (3) indicate that each mode p_1 or p_2 of a nanofiber is, in general, coupled to both modes p_1 and p_2 of the other nanofiber. In addition, modes p_1 and p_2 of a nanofiber can also be coupled to each other due to the presence of the other nanofiber.

3. Coupling coefficients for the modes with the principal quasilinear polarizations

Without loss of generality, we use the basis modes that are quasilinearly polarized [26–28, 47–49] along the radial axis x and the tangential axis y and are labeled by the polarization index $p = x$ and y , respectively. We refer to the quasilinear polarizations along these main axes as the principal quasilinear polarizations. We recall that $\mathcal{E}_j^{(p)}$ and $\mathcal{H}_j^{(p)}$ are the envelopes of the electric and magnetic parts of the p -polarized forward fundamental mode of nanofiber j before mode coupling. For convenience and without loss of generality, we use the sets $(\mathcal{E}_1^{(p)}, \mathcal{H}_1^{(p)})$ and $(\mathcal{E}_2^{(p)}, \mathcal{H}_2^{(p)})$ that are identical to each other in their corresponding local fiber-based coordinate systems, that is, $\mathcal{E}_1^{(p)}(r_1, \varphi_1) = \mathcal{E}_2^{(p)}(r_2, \varphi_2)$ and $\mathcal{H}_1^{(p)}(r_1, \varphi_1) = \mathcal{H}_2^{(p)}(r_2, \varphi_2)$ for $r_1 = r_2$ and $\varphi_1 = \varphi_2$. For convenience, we normalize the sets of the mode functions $(\mathcal{E}_j^{(p)}, \mathcal{H}_j^{(p)})$ for different indices j and p to have the same power P_0 . The explicit expressions for $\mathcal{E}_j^{(p)}$ and $\mathcal{H}_j^{(p)}$ are given in appendix A.

We plot in figure 2 the cross-sectional profiles of the electric intensity distributions $|\mathcal{E}_j^{(p)}|^2$ of the fields in the x - and y -polarized fundamental guided modes of a single nanofiber j . The free-space wavelength of light is $\lambda = 800$ nm, and the refractive indices of the fibers and the vacuum cladding are $n_1 = n_2 = 1.45$ and $n_0 = 1$, respectively. The figure shows that the intensity distribution $|\mathcal{E}_j^{(p)}|^2$ is symmetric with respect to the x_j and y_j axes. The symmetry of the intensity distribution is a consequence of the fact that the Cartesian components of the mode functions of the quasilinearly polarized modes are even or odd functions of the transverse coordinates x_j and y_j (see equations (A.3) and (A.4)).

It follows from expressions (A.3) and (A.4) that, when we perform the transformation $(x, y) \rightarrow (x, -y)$, that is, $(r_j, \varphi_j) \rightarrow (r_j, -\varphi_j)$, the field components are transformed as described by the formulas

$$\begin{aligned} \mathcal{E}_{jx}^{(x)} &\rightarrow \mathcal{E}_{jx}^{(x)}, & \mathcal{E}_{jy}^{(x)} &\rightarrow -\mathcal{E}_{jy}^{(x)}, & \mathcal{E}_{jz}^{(x)} &\rightarrow \mathcal{E}_{jz}^{(x)}, \\ \mathcal{H}_{jx}^{(x)} &\rightarrow -\mathcal{H}_{jx}^{(x)}, & \mathcal{H}_{jy}^{(x)} &\rightarrow \mathcal{H}_{jy}^{(x)}, & \mathcal{H}_{jz}^{(x)} &\rightarrow -\mathcal{H}_{jz}^{(x)}, \end{aligned} \quad (4)$$

and

$$\begin{aligned} \mathcal{E}_{jx}^{(y)} &\rightarrow -\mathcal{E}_{jx}^{(y)}, & \mathcal{E}_{jy}^{(y)} &\rightarrow \mathcal{E}_{jy}^{(y)}, & \mathcal{E}_{jz}^{(y)} &\rightarrow -\mathcal{E}_{jz}^{(y)}, \\ \mathcal{H}_{jx}^{(y)} &\rightarrow \mathcal{H}_{jx}^{(y)}, & \mathcal{H}_{jy}^{(y)} &\rightarrow -\mathcal{H}_{jy}^{(y)}, & \mathcal{H}_{jz}^{(y)} &\rightarrow \mathcal{H}_{jz}^{(y)}, \end{aligned} \quad (5)$$

which lead to

$$(\mathcal{E}_j^{(x)*} \cdot \mathcal{E}_j^{(y)}) \rightarrow -(\mathcal{E}_j^{(x)*} \cdot \mathcal{E}_j^{(y)}), \quad [\mathcal{E}_j^{(x)*} \times \mathcal{H}_j^{(y)}]_z \rightarrow -[\mathcal{E}_j^{(x)*} \times \mathcal{H}_j^{(y)}]_z. \quad (6)$$

We use the above symmetry relations to calculate the integrals in equations (3). Then, we obtain

$$\kappa_{jj'}^{(pp')} = \kappa_{jj'}^{(pp)} \delta_{pp'}, \quad c_{jj'}^{(pp')} = c_{jj'}^{(pp)} \delta_{pp'}, \quad \chi_j^{(pp')} = \chi_j^{(pp)} \delta_{pp'}. \quad (7)$$

According to equations (7), the mode coupling coefficients $\kappa_{jj'}^{(pp')}$, $c_{jj'}^{(pp')}$, and $\chi_j^{(pp')}$ are zero for $(p, p') = (\mathbf{x}, \mathbf{y})$ or (\mathbf{y}, \mathbf{x}) , that is, for the pair of orthogonal x - and y -polarized modes. Thus, the two polarizations are decoupled. This decoupling is a consequence of the symmetry of the two-fiber system about the principal x and y axes. Note that the first relation in equations (7) is in agreement with [27].

For an appropriate choice of the phase of the normalization constant for the mode functions, we have [26–28, 47–49]

$$\begin{aligned} e_r^* &= -e_r, & e_\varphi^* &= e_\varphi, & e_z^* &= e_z, \\ h_r^* &= h_r, & h_\varphi^* &= -h_\varphi, & h_z^* &= -h_z. \end{aligned} \quad (8)$$

When we use the above relations and expressions (A.3) and (A.4), we can show that

$$\begin{aligned} \mathcal{E}_{jx}^{(p)*} &= -\mathcal{E}_{jx}^{(p)}, & \mathcal{E}_{jy}^{(p)*} &= -\mathcal{E}_{jy}^{(p)}, & \mathcal{E}_{jz}^{(p)*} &= \mathcal{E}_{jz}^{(p)}, \\ \mathcal{H}_{jx}^{(p)*} &= -\mathcal{H}_{jx}^{(p)}, & \mathcal{H}_{jy}^{(p)*} &= -\mathcal{H}_{jy}^{(p)}, & \mathcal{H}_{jz}^{(p)*} &= \mathcal{H}_{jz}^{(p)}. \end{aligned} \quad (9)$$

Then, equations (3) yield

$$\kappa_{jj'}^{(pp')} = \kappa_{jj'}^{(pp')*}, \quad c_{jj'}^{(pp')} = c_{jj'}^{(pp')*}, \quad \chi_j^{(pp')} = \chi_j^{(pp')*}. \quad (10)$$

Thus, for an appropriate choice of the phase of the normalization constant for the mode functions, the mode coupling coefficients $\kappa_{jj'}^{(pp')}$, $c_{jj'}^{(pp')}$, and $\chi_j^{(pp')}$ for the x - and y -polarized modes are real-valued coefficients.

It follows from expressions (A.3) and (A.4) that, in the central Cartesian coordinate system $\{x, y\}$ for the fiber transverse plane, we have the relations


$$\begin{aligned} \mathcal{E}_{1x}^{(p)}(x, y) &= \mathcal{E}_{2x}^{(p)}(-x, -y), \\ \mathcal{E}_{1y}^{(p)}(x, y) &= \mathcal{E}_{2y}^{(p)}(-x, -y), \\ \mathcal{E}_{1z}^{(p)}(x, y) &= -\mathcal{E}_{2z}^{(p)}(-x, -y), \end{aligned} \quad (11)$$

and

$$\begin{aligned} \mathcal{H}_{1x}^{(p)}(x, y) &= \mathcal{H}_{2x}^{(p)}(-x, -y), \\ \mathcal{H}_{1y}^{(p)}(x, y) &= \mathcal{H}_{2y}^{(p)}(-x, -y), \\ \mathcal{H}_{1z}^{(p)}(x, y) &= -\mathcal{H}_{2z}^{(p)}(-x, -y). \end{aligned} \quad (12)$$

Hence, we can show that

$$\kappa_{12}^{(pp)} = \kappa_{21}^{(pp)}, \quad c_{12}^{(pp)} = c_{21}^{(pp)}, \quad \chi_1^{(pp)} = \chi_2^{(pp)}. \quad (13)$$


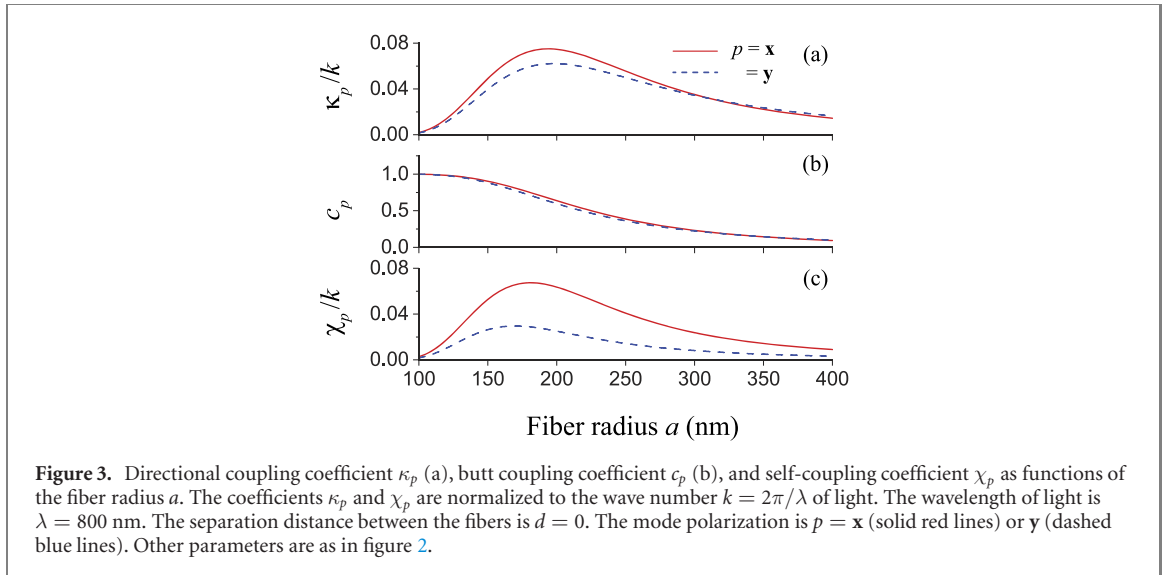


It follows from equations (7), (10), and (13) that all the mode coupling coefficients $\kappa_{jj'}^{(pp')}$, $c_{jj'}^{(pp')}$, and $\chi_j^{(pp')}$ satisfy the Hermitian conjugate relationship, that is, $\kappa_{jj'}^{(pp')} = \kappa_{j'j}^{(p'p)*}$, $c_{jj'}^{(pp')} = c_{j'j}^{(p'p)*}$, and $\chi_j^{(pp')} = \chi_{j'}^{(p'p)*}$.

Due to the diagonal properties (7) and the symmetry properties (13), it is convenient to use the simplified notations $\kappa_p = \kappa_{12}^{(pp)} = \kappa_{21}^{(pp)}$, $c_p = c_{12}^{(pp)} = c_{21}^{(pp)}$, and $\chi_p = \chi_1^{(pp)} = \chi_2^{(pp)}$. In the following, we calculate the coupling coefficients κ_p , c_p , and χ_p for the pairs of quasilinearly polarized fundamental modes of the fibers with the same x or y principal polarization. According to equations (10), these coefficients are real-valued.

We plot in figure 3 the directional coupling coefficient κ_p , the butt coupling coefficient c_p , and the self-coupling coefficient χ_p as functions of the fiber radius a . The wavelength of light is $\lambda = 800$ nm and the separation distance between the fibers is $d = 0$. The figure shows that the directional coupling coefficient κ_p has a peak at almost the same point $a \simeq 195$ nm for both the x and y polarizations, and the self-coupling coefficient χ_p has a peak at $a \simeq 180$ and 170 nm for the x and y polarizations, respectively. Meanwhile, the butt coupling coefficient c_p monotonically reduces with increasing fiber radius a . Note that the peak in the dependence of the coefficient κ_p on a was not observed in [35] because calculation results were not presented for $a \leq 200$ nm. In the limit of large fiber radii $a \gg \lambda/2\pi$, the coefficients κ_p , c_p , and χ_p reduce to zero. This behavior is a consequence of the reduction of the overlap between the modes of different fibers in the limit of large a . In the limit of small fiber radii $a \ll \lambda/2\pi$, the coefficients κ_p and χ_p reduce to zero and the coefficient c_p increases to 1. The difference in the limiting value is due to the facts that the integrals in the numerators of the expressions for κ_p and χ_p in equations (3) are carried out in the cross-sectional area of a fiber, while the integral in the numerator of the expression for c_p is carried out in the full transverse plane xy and, for a small fiber size parameter, the mode profiles extend far beyond the nanofiber surfaces. We observe that the differences between the values of χ_p for the x and y polarizations (see the solid red and dashed blue lines in figure 3(c)) are more significant than the differences between the corresponding values of κ_p (see the solid red and dashed blue lines in figure 3(a)), and the latter are in turn more significant than the differences between the corresponding values of c_p (see the solid red and dashed blue lines in figure 3(b)). We observe that the numerically obtained values of κ_p , c_p , and χ_p are positive for all values of the fiber radius a .

In figure 4, we plot the coefficients κ_p , c_p , and χ_p as functions of the light wavelength λ . The fiber radius is $a = 200$ nm and the separation distance between the fibers is $d = 0$. The refractive index of the nanofibers depends on the wavelength of light and is calculated from the four-term Sellmeier formula for fused silica [50, 51]. We observe that κ_p and χ_p have local maxima while c_p monotonically increases with increasing λ . In the limit of short wavelengths $\lambda/2\pi \ll a$, the coefficients κ_p , c_p , and χ_p reduce to zero. In the limit of long wavelengths $\lambda/2\pi \gg a$, the coefficients κ_p and χ_p reduce to zero and the coefficient c_p increases to 1. We observe that the numerically obtained values of κ_p , c_p , and χ_p are positive for all values of λ . Note that the fiber size parameter ka determines the relative size of the system. Therefore, the curves of figure 3 can be converted into those of figure 4 through the transformation $\lambda = \lambda_0 a_0/a$ for the horizontal axis. Here, we have the values $\lambda_0 = 800$ nm and $a_0 = 200$ nm, which were used in the calculations of figures 3 and 4, respectively. This conversion is not exact because of the effect of the dispersion of the refractive index of the fiber material. However, such discrepancies are very small.

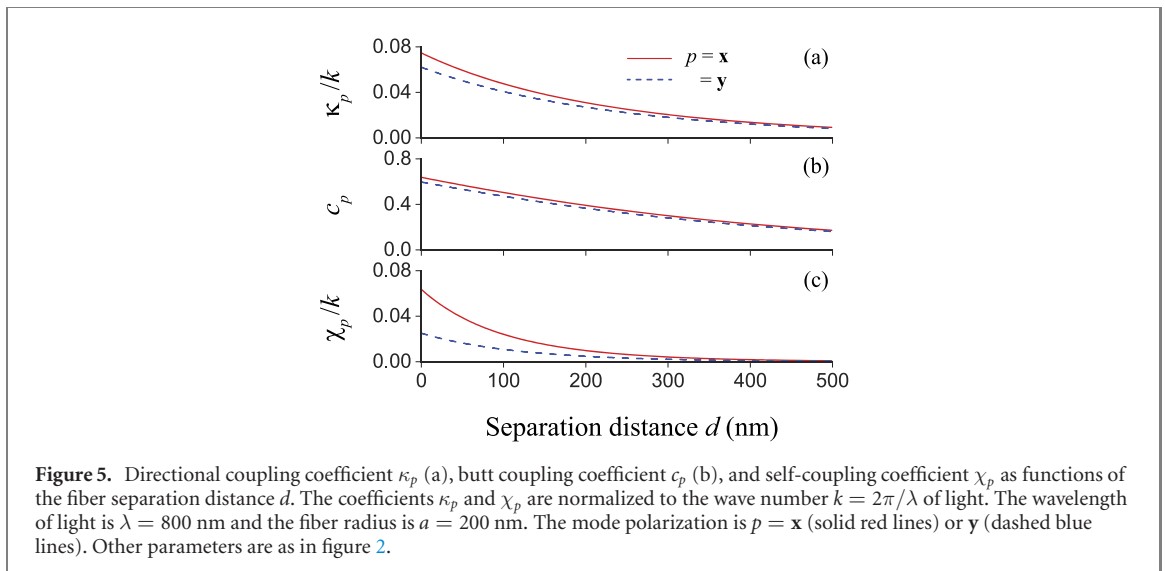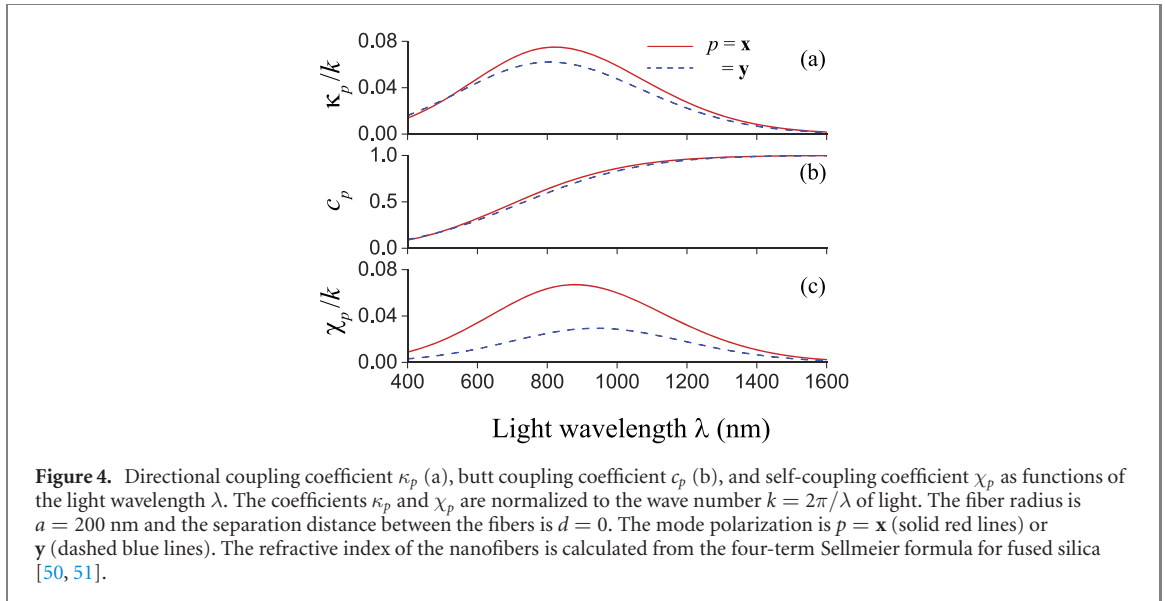

We note that the coupled mode theory is based on the perturbation method. The accuracy of this method depends on the strength of the coupling and, hence, on the overlap between the modes of the two waveguides. The mode overlap between the adjacent fibers depends on not only the fiber separation distance d but also the fiber radius a and the light wavelength λ . Huang and Chang have shown that, for the fibers and light with the parameters in a range of interest, the coupled mode theory gives satisfactory results even when the fibers are touching each other [52]. However, we recognize that, for ultrathin optical nanofibers, since the guided fields can penetrate deeply into the outside of the fibers, the coupled mode theory may not be accurate when the nanofibers are very close to each other. Despite this fact, we chose $d = 0$ for the calculations of figures 3 and 4 (and also of figures 6, 7, and 11 in the next section). The reasons are that we want to show the predictions of the coupled mode theory for a situation close to the experimental situation of [35], and to compare our calculations with the calculations of [35]. The validity of the coupled mode theory for two coupled nanofibers in the case of a small fiber separation d with a small fiber radius a or a large light wavelength λ should be investigated in the future.

We plot in figure 5 the coefficients κ_p , c_p , and χ_p as functions of the fiber separation distance d . The wavelength of light is $\lambda = 800$ nm and the fiber radius is $a = 200$ nm. We observe from the figure that κ_p , c_p , and χ_p are significant in the region of small d , and reduce monotonically with increasing d . This reduction is a consequence of the evanescent wave nature of the guided modes outside the fibers. Comparison between figures 5(a)–(c) shows that, when d increases, χ_p and c_p reduce faster and more slowly, respectively, than κ_p . It is clear from figures 5(a) and (c) that χ_p is comparable to or much smaller than κ_p in the region of small or large separation distances d , respectively. The differences between the

values of χ_p for the x and y polarizations (see the solid red and dashed blue lines in figure 5(c)) are more significant than the differences between the corresponding values of κ_p (see the solid red and dashed blue lines in figure 5(a)), and the latter are in turn more significant than the differences between the corresponding values of c_p (see the solid red and dashed blue lines in figure 5(b)). We observe that the numerically obtained values of κ_p , c_p , and χ_p are positive for all values of the fiber separation distance d .

According to [26–28], in most of the conventional analyses of directional couplers, the butt coupling coefficients c_p and the self-coupling coefficient χ_p were neglected. Our numerical results presented in figures 3–5 show that, in the case of coupled nanofibers, the coefficients c_p and χ_p are significant and, hence, should be taken into account. We note that, in [35], where the coupling of two parallel nanofibers was studied, the directional coupling coefficient was calculated but the butt coupling coefficient and the self-coupling coefficient were omitted from consideration [53].

In general, an arbitrary fundamental guided mode is a superposition of the x - and y -polarized modes. Therefore, we can decompose the electric and magnetic parts of the field in an arbitrary mode p of nanofiber j as $\mathcal{E}_j^{(p)} = \alpha_{pj}^{(x)} \mathcal{E}_j^{(x)} + \alpha_{pj}^{(y)} \mathcal{E}_j^{(y)}$ and $\mathcal{H}_j^{(p)} = \alpha_{pj}^{(x)} \mathcal{H}_j^{(x)} + \alpha_{pj}^{(y)} \mathcal{H}_j^{(y)}$, where $\alpha_{pj}^{(x)}$ and $\alpha_{pj}^{(y)}$ are coefficients determining the overall power and polarization of the field ($\mathcal{E}_j^{(p)}$, $\mathcal{H}_j^{(p)}$) through the sum $|\alpha_{pj}^{(x)}|^2 + |\alpha_{pj}^{(y)}|^2$ and the ratio $\alpha_{pj}^{(x)}/\alpha_{pj}^{(y)}$. For convenience and without loss of generality, we normalize the power so that $|\alpha_{pj}^{(x)}|^2 + |\alpha_{pj}^{(y)}|^2 = 1$. With the help of equations (3) and (10), we can show that

$$\begin{aligned} \kappa_{jj'}^{(pp')} &= \alpha_{pj}^{(x)*} \alpha_{p'j'}^{(x)} \kappa_x + \alpha_{pj}^{(y)*} \alpha_{p'j'}^{(y)} \kappa_y, \\ c_{jj'}^{(pp')} &= \alpha_{pj}^{(x)*} \alpha_{p'j'}^{(x)} c_x + \alpha_{pj}^{(y)*} \alpha_{p'j'}^{(y)} c_y, \\ \chi_j^{(pp')} &= \alpha_{pj}^{(x)*} \alpha_{p'j'}^{(x)} \chi_x + \alpha_{pj}^{(y)*} \alpha_{p'j'}^{(y)} \chi_y. \end{aligned} \tag{14}$$

Equations (14) allow us to calculate the coefficients $\kappa_{jj'}^{(pp')}$, $c_{jj'}^{(pp')}$, and $\chi_j^{(pp')}$ for the coupling between the modes with arbitrary polarizations p and p' . In general, the mode expansion coefficients $\alpha_{pj,p'j'}^{(x,y)}$ are complex-valued, and hence so are the mode coupling coefficients $\kappa_{jj'}^{(pp')}$, $c_{jj'}^{(pp')}$, and $\chi_j^{(pp')}$ although they all satisfy the Hermitian conjugate relationship, namely, $\kappa_{jj'}^{(pp')} = \kappa_{j'j}^{(p'p)*}$, $c_{jj'}^{(pp')} = c_{j'j}^{(p'p)*}$, and $\chi_j^{(pp')} = \chi_j^{(p'p)*}$.

4. Power transfer and phase shift

Equations (7) indicate that the mode with the principal quasilinear polarization $p = \mathbf{x}$ or \mathbf{y} of nanofiber $j = 1, 2$ is coupled to the mode with the same polarization p of the other nanofiber $j' = 2, 1$ but not to the modes with the orthogonal polarization $p' = \mathbf{y}$ or \mathbf{x} of both nanofibers. Due to this diagonal coupling property for the modes with the principal quasilinear polarizations, the set of the coupled mode equations (2) splits into two independent sets, one for $p = \mathbf{x}$ and the other one for $p = \mathbf{y}$. These independent sets for the modes with the same principal quasilinear polarization $p = \mathbf{x}$ or \mathbf{y} can be written in the same form

$$\begin{aligned} \frac{dA_1^{(p)}}{dz} + c_p \frac{dA_2^{(p)}}{dz} - i\chi_p A_1^{(p)} - i\kappa_p A_2^{(p)} &= 0, \\ \frac{dA_2^{(p)}}{dz} + c_p \frac{dA_1^{(p)}}{dz} - i\chi_p A_2^{(p)} - i\kappa_p A_1^{(p)} &= 0, \end{aligned} \tag{15}$$

where κ_p , c_p , and χ_p are real-valued coefficients. From equations (15), we obtain

$$\frac{dA_1^{(p)}}{dz} = i\delta_p A_1^{(p)} + i\eta_p A_2^{(p)}, \quad \frac{dA_2^{(p)}}{dz} = i\delta_p A_2^{(p)} + i\eta_p A_1^{(p)}, \tag{16}$$

where

$$\eta_p = \frac{\kappa_p - c_p \chi_p}{1 - c_p^2}, \quad \delta_p = \frac{\chi_p - c_p \kappa_p}{1 - c_p^2}. \tag{17}$$

The eigenvalues of the coupled differential equations (16) are purely imaginary and are given as $i(\delta_p \pm \eta_p)$. The corresponding eigenvectors are given as $(A_1^{(p)}, A_2^{(p)}) = (1, \pm 1)2^{-1/2} e^{i(\delta_p \pm \eta_p)z}$. They represent the normal modes of the coupled nanofibers. The propagation constants of the normal modes are $\beta + \delta_p \pm \eta_p$, shifted from the propagation constant β of the single-fiber modes by an amount equal to the imaginary part of the corresponding eigenvalue.

The general solution to equations (16) is found to be

$$\begin{aligned} A_1^{(p)}(z) &= e^{i\delta_p z} [A_1^{(p)}(0) \cos(\eta_p z) + iA_2^{(p)}(0) \sin(\eta_p z)], \\ A_2^{(p)}(z) &= e^{i\delta_p z} [A_2^{(p)}(0) \cos(\eta_p z) + iA_1^{(p)}(0) \sin(\eta_p z)]. \end{aligned} \quad (18)$$

It is clear from equations (18) that η_p characterizes the power transfer between the coupled nanofibers and δ_p determines the phase shift. We have

$$|A_1^{(p)}(z)|^2 + |A_2^{(p)}(z)|^2 = |A_1^{(p)}(0)|^2 + |A_2^{(p)}(0)|^2. \quad (19)$$

The total power of the field in the p -polarized guided modes of the entire coupled-nanofiber system is given as [28, 39, 41]

$$P^{(p)} = [|A_1^{(p)}|^2 + |A_2^{(p)}|^2 + 2c_p \text{Re}(A_1^{(p)} A_2^{(p)*})] P_0, \quad (20)$$

where P_0 is the common power of the basis single-fiber modes with the mode functions $(\mathcal{E}_j^{(p)}, \mathcal{H}_j^{(p)})$. We can show that

$$P^{(p)}(z) = P^{(p)}(0). \quad (21)$$

Thus, the total power of the light field in the guided modes with a given principal polarization $p = \mathbf{x}, \mathbf{y}$ of the two nanofibers is conserved in the propagation process, and hence so is the total power $P = P^{(\mathbf{x})} + P^{(\mathbf{y})}$ of the guided light field of the nanofibers. Total power conservation is a general result for coupled lossless waveguides [26–28, 54]. The conservation of the total power of the copropagating guided modes of the coupled fibers is a consequence of the fact that the coupling between counterpropagating modes and the coupling between guided and radiation modes are negligible.

It is tricky to define the guided power in an individual waveguide. According to the conventional coupled mode theory [39, 41], the power of guided light in the p -polarized mode of the individual fiber j is defined as

$$P_j^{(p)}(z) = |A_j^{(p)}(z)|^2 P_0. \quad (22)$$

Meanwhile, according to the nonorthogonal coupled mode theory [39, 41], if one fiber, for example, fiber j' , is terminated at z , then the power remaining in the p -polarized mode of the other fiber, namely fiber $j \neq j'$, is defined as

$$\tilde{P}_j^{(p)}(z) = |A_j^{(p)}(z) + c_p A_{j'}^{(p)}(z)|^2 P_0 = |\tilde{A}_j^{(p)}(z)|^2 P_0, \quad (23)$$

where

$$\begin{aligned} \tilde{A}_j^{(p)}(z) &= A_j^{(p)}(z) + c_p A_{j'}^{(p)}(z) \\ &= e^{i\delta_p z} [\tilde{A}_j^{(p)}(0) \cos(\eta_p z) + i\tilde{A}_j^{(p)}(0) \sin(\eta_p z)] \end{aligned} \quad (24)$$

with $\tilde{A}_j^{(p)}(0) = A_j^{(p)}(0) + c_p A_{j'}^{(p)}(0)$. It is clear that expression (22) in terms of the input amplitudes $A_1^{(p)}(0)$ and $A_2^{(p)}(0)$ is the same as expression (23) in terms of the input amplitudes $\tilde{A}_1^{(p)}(0)$ and $\tilde{A}_2^{(p)}(0)$. Note that the definition (23) reduces to the definition (22) when butt coupling is neglected.

In general, we have $P_1^{(p)} + P_2^{(p)} \neq P^{(p)}$ and $\tilde{P}_1^{(p)} + \tilde{P}_2^{(p)} \neq P^{(p)}$. Thus, the sum of the powers of the two individual fibers may not be equal to the total power guided in the entire coupled-fiber system [39, 41]. This is not a violation of the law of power conservation but a consequence of the definitions assumed for the powers in the individual fibers [41].

For the simplicity of analysis, we use the definition (22). The power of the total guided light of nanofiber j is given by $P_j = P_j^{(\mathbf{x})} + P_j^{(\mathbf{y})} = (|A_j^{(\mathbf{x})}|^2 + |A_j^{(\mathbf{y})}|^2) P_0$. It follows from equation (19) that the sum $P_1^{(p)} + P_2^{(p)}$ of the powers of the light fields in the guided modes with a given principal polarization $p = \mathbf{x}, \mathbf{y}$ of the two nanofibers is conserved in the propagation process, and hence so is the sum $P_1 + P_2$ of the powers P_1 and P_2 of the guided light fields of nanofibers 1 and 2, respectively.

It is worth noting here that the strength of the power transfer is determined by the absolute value $|\eta_p|$ of the coefficient η_p regardless of its sign. The effective coupling length over which complete power transfer may occur is given by $L_p = \pi/2|\eta_p|$.

The numerator of the expression for the power transfer coefficient η_p in equations (17) has two terms, namely κ_p and $-c_p \chi_p$. The term κ_p describes the contribution of the directional coupling. The term $-c_p \chi_p$ characterizes the contribution of the butt coupling and the self coupling. It is interesting to note that, for the parameters in the range of interest, the coefficients κ_p , c_p , and χ_p are positive (see figures 3–5) and hence the terms κ_p and $-c_p \chi_p$ have opposite signs. This means that the power transfer is a result of the competition between the directional coupling, from one side, and the butt coupling and the self coupling, from the other side.

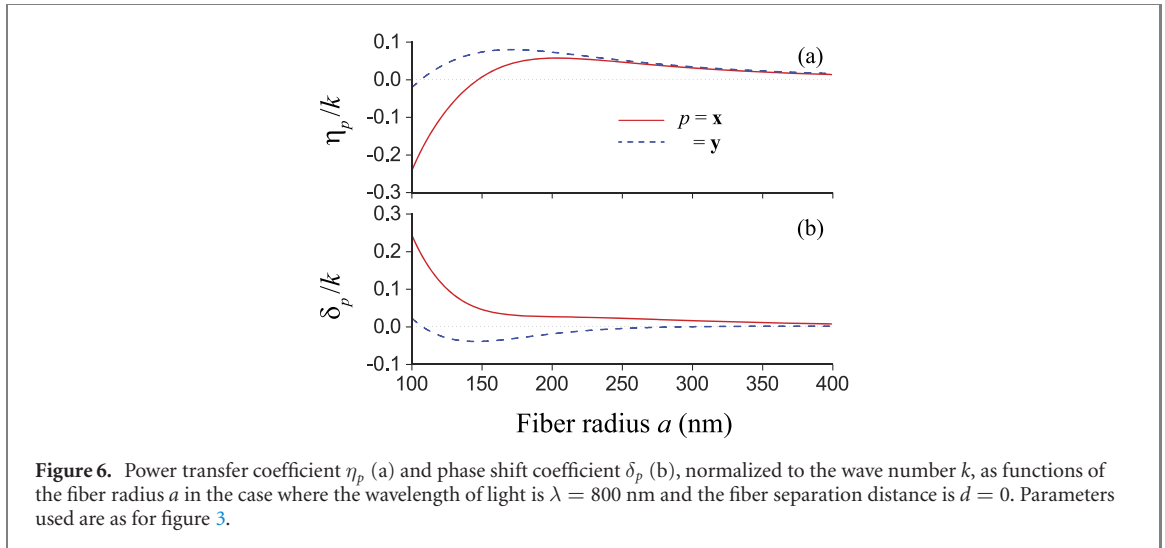


Figure 6. Power transfer coefficient η_p (a) and phase shift coefficient δ_p (b), normalized to the wave number k , as functions of the fiber radius a in the case where the wavelength of light is $\lambda = 800$ nm and the fiber separation distance is $d = 0$. Parameters used are as for figure 3.

Similarly, the numerator of the expression for the fiber-coupling-induced phase shift coefficient δ_p in equations (17) also has two terms, χ_p and $-c_p\kappa_p$, whose signs are opposite to each other. Thus, the fiber-coupling-induced phase shift of a guided mode is a result of the competition between the self coupling, from one side, and the butt coupling and the directional coupling, from the other side.

In general, we have $\eta_p \neq \kappa_p$ and $\delta_p \neq \chi_p$. In the limit of large separation distances d , we have the relations $|c_p| \ll 1$ and $|\chi_p| \ll |\kappa_p|$ [26–28], which lead to $\eta_p \simeq \kappa_p$ and $\delta_p \simeq 0$. In the cases where the fiber radius a is small, the light wavelength λ is large, or the fiber separation distance d is small, the butt coupling coefficient c_p and the self-coupling coefficient χ_p cannot be neglected (see figures 3–5 and [26–28]).

We plot in figure 6 the power transfer coefficient η_p and the phase shift coefficient δ_p as functions of the fiber radius a for the parameters of figure 3. Figure 6 shows that, in the limit of small fiber radii, both η_p and δ_p tend to nonzero limiting values, unlike κ_p and χ_p , which tend to zero. Note that the corresponding asymptotic value of η_p is opposite to that of δ_p . This feature is a consequence of the fact that $c_p \rightarrow 1$ in the limit of small a .

We observe from figure 6(a) that the power transfer coefficient η_p has a local peak at $a \simeq 204$ and 171 nm for $p = x$ (solid red curve) and y (dashed blue curve), respectively. This figure also shows that η_p is zero at $a \simeq 147$ and 106 nm for $p = x$ and y , respectively. It is interesting to note that η_p is negative, that is, $\kappa_p < c_p\chi_p$, in the regions $a \leq 147$ nm and $a \leq 106$ nm for $p = x$ and y , respectively. Careful inspection of the data presented in figures 3 and 6(a) shows that, in the aforementioned regions, where η_p is negative, we have $c_p \simeq 1$ and $\kappa_p < \chi_p$. Thus, the negative sign of η_p for small fiber radii a is a signature of the facts that the butt coupling coefficient c_p is close to unity and the self-coupling coefficient χ_p is larger than the directional coupling coefficient κ_p . As already mentioned, the strength of the power transfer is determined by the absolute value $|\eta_p|$ of the coefficient η_p . We observe that, when a is large enough, the effects of the butt coupling and the self coupling are less significant than that of the directional coupling and, hence, η_p is positive. Comparison between the solid red and dashed blue curves of figure 6(a) shows that we may have all the three possibilities $|\eta_x| < |\eta_y|$, $|\eta_x| = |\eta_y|$, and $|\eta_x| > |\eta_y|$ depending on the fiber radius a . We observe from figure 6 that the differences between η_x and η_y and between δ_x and δ_y are significant in the region of small a but not significant in the region of large a .

We plot in figure 7 the power transfer coefficient η_p and the phase shift coefficient δ_p as functions of the wavelength λ of light for the parameters of figure 4. Figure 7 shows that, in the limit of long wavelengths, both η_p and δ_p tend to nonzero limiting values, unlike κ_p and χ_p , which tend to zero. In this limit, since $c_p \rightarrow 1$, the asymptotic value of η_p is opposite to that of δ_p .

We observe from figure 7(a) that the power transfer coefficient η_p has a local peak at $\lambda \simeq 785$ and 930 nm for $p = x$ (solid red curve) and y (dashed blue curve), respectively. The figure shows that η_p is zero at $\lambda \simeq 1088$ and 1501 nm for $p = x$ and y , respectively, and that η_p is negative in the regions $\lambda \geq 1088$ nm and $\lambda \geq 1501$ nm for $p = x$ and y , respectively. The facts that η_p can become zero or negative are consequences of the competition between the contribution of the directional coupling, from one side, and the contribution of the butt coupling and the self coupling, from the other side. When λ is small enough, the effects of the butt coupling and the self coupling are less significant than those of the directional coupling and, hence, η_p is positive. Comparison between the solid red and dashed blue curves of figure 7(a) shows that we may have all the three possibilities $|\eta_x| < |\eta_y|$, $|\eta_x| = |\eta_y|$, and $|\eta_x| > |\eta_y|$ depending on the wavelength λ . We observe from figure 7 that the differences between η_x and η_y and between δ_x and δ_y are

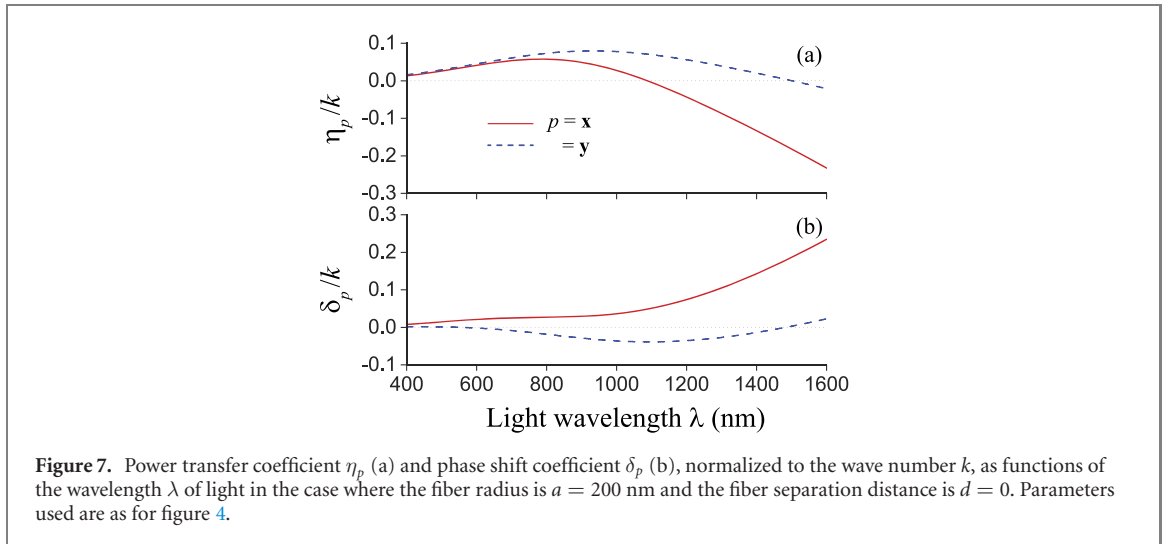


Figure 7. Power transfer coefficient η_p (a) and phase shift coefficient δ_p (b), normalized to the wave number k , as functions of the wavelength λ of light in the case where the fiber radius is $a = 200$ nm and the fiber separation distance is $d = 0$. Parameters used are as for figure 4.


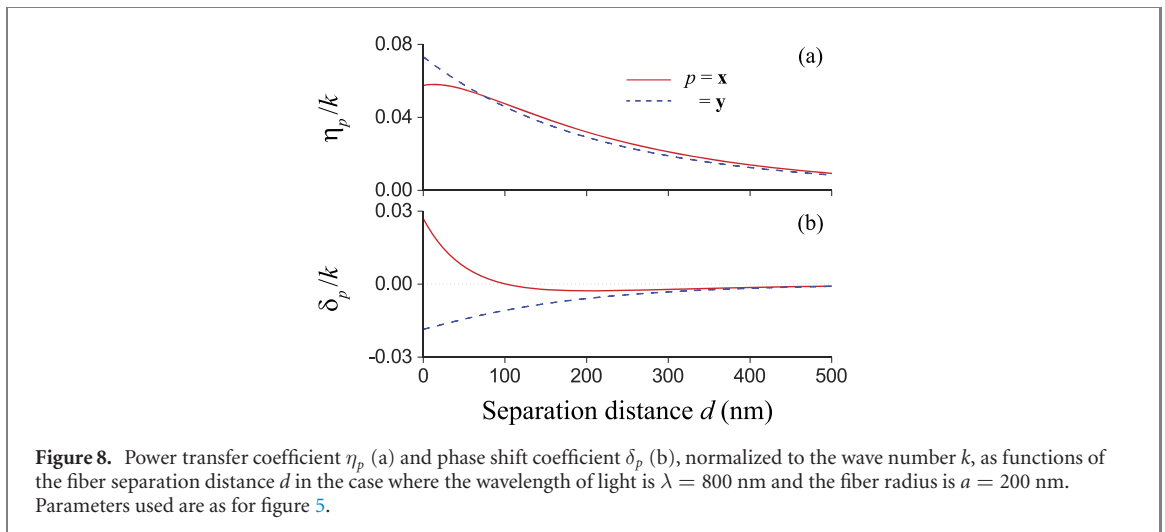


Figure 8. Power transfer coefficient η_p (a) and phase shift coefficient δ_p (b), normalized to the wave number k , as functions of the fiber separation distance d in the case where the wavelength of light is $\lambda = 800$ nm and the fiber radius is $a = 200$ nm. Parameters used are as for figure 5.

significant in the region of large λ but not significant in the region of small λ . Since the relative size of the system is determined by the fiber size parameter ka , the curves of figure 6 can be converted into those of figure 7 through the transformation $\lambda = \lambda_0 a_0 / a$ for the horizontal axis, like the case of figures 3 and 4.

We plot in figure 8 the power transfer coefficient η_p and the phase shift coefficient δ_p as functions of the fiber separation distance d for the parameters of figure 5. We observe from the solid red curve of figure 8(a) that the coefficient η_p for the mode with the polarization $p = x$ achieves its maximum value at a nonzero separation distance $d = 14$ nm. This behavior is different from that of κ_p , which reduces monotonically with increasing d (see figure 5(a)). The occurrence of a local peak in the dependence of the power transfer coefficient η_p on d is a result of the competition between the directional coupling coefficient κ_p , the butt coupling coefficient c_p , and the self-coupling coefficient χ_p (see the expression for η_p in equations (17)). We observe from figure 8(a) that η_p is positive. This feature is a signature of the fact that, when a is large enough, the effect of the directional coupling on the power transfer is more significant than that of the butt coupling and the self coupling. Comparison between the solid red and dashed blue curves of figure 8(a) shows that we may have all the three possibilities $|\eta_x| < |\eta_y|$, $|\eta_x| = |\eta_y|$, and $|\eta_x| > |\eta_y|$ depending on the fiber separation distance d . In the case of figure 8(a), we have $|\eta_x| < |\eta_y|$ and $|\eta_x| > |\eta_y|$ in the regions $d < 73$ nm and $d > 73$ nm, respectively. We observe from figure 8 that the differences between η_x and η_y and between δ_x and δ_y are significant in the region of small d but not significant in the region of large d .

In order to see more clearly the effects of the butt coupling and the self coupling on the power transfer for small fiber radii and short fiber separation distances, we plot in figure 9 the power transfer coefficients η_x and η_y as functions of the fiber separation distance d for the fiber radii $a = 100, 110, 120,$ and 130 nm. The figure shows that, in the cases where $p = x$ and y , the coefficient η_p for power transfer can become

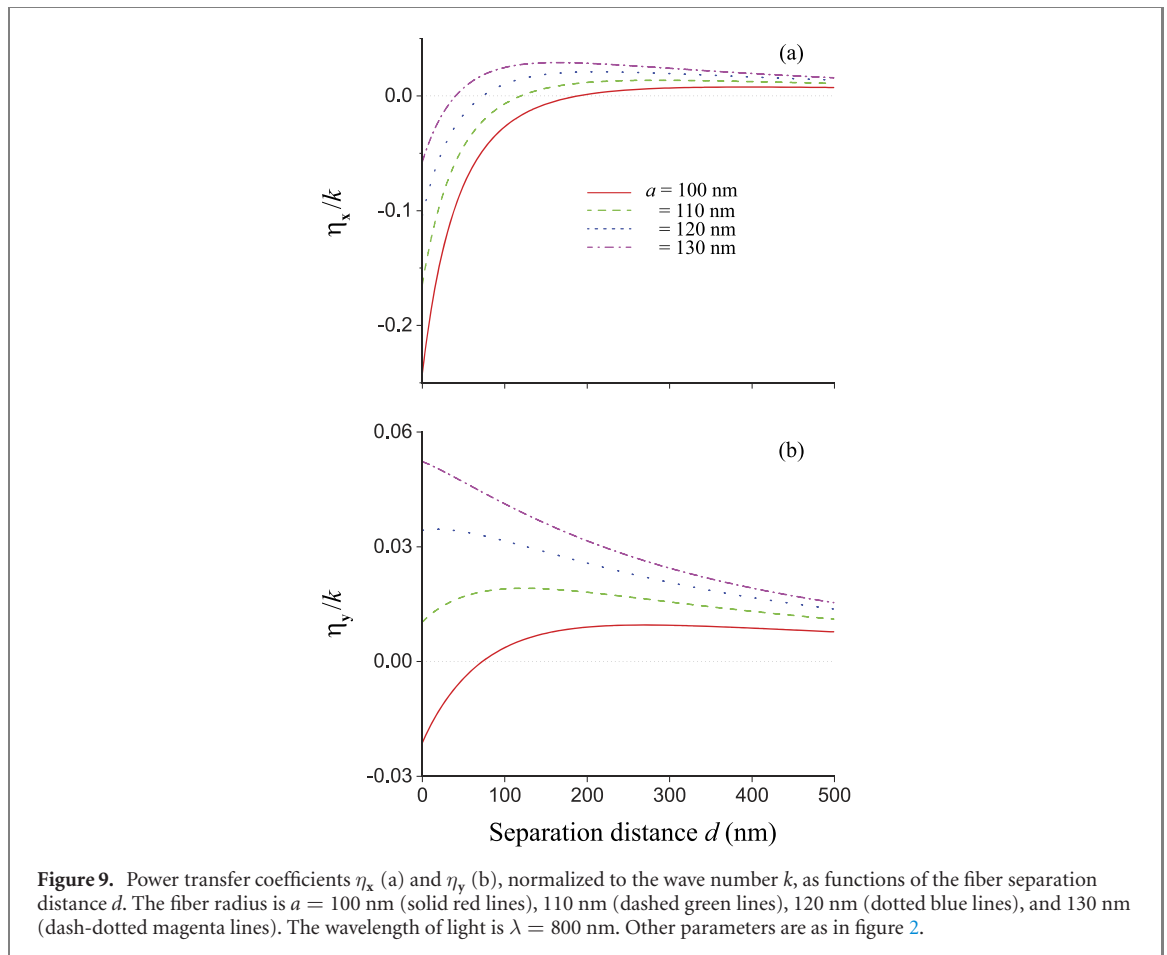



negative, be equal to zero, or have a local peak at a nonzero d . These features are consequences of the fact that the butt coupling coefficient c_p and the self-coupling coefficient χ_p are significant in the regions of small fiber radii and short fiber separation distances. We observe from figure 9 that, when d is large enough, the effects of the butt coupling and the self coupling on the power transfer are less significant than those of the directional coupling and, hence, η_p is positive.

In order to get a broader view, we plot in figure 10 the dependencies of the power transfer coefficients η_x and η_y on the fiber radius a and the fiber separation distance d . The figure shows clearly that, due to the effects of the butt coupling and the self coupling, η_x and η_y are negative when a and d are small enough. The coefficients η_x and η_y can become zero for some specific values of a and d . When a or d is large enough, the effects of the butt coupling and the self coupling on the power transfer are less significant than those of the directional coupling and, hence, η_x and η_y are positive.

The power transfer between the coupled nanofibers is described by equations (18). We use these equations to calculate the power $P_1 = (|A_1^{(x)}|^2 + |A_1^{(y)}|^2)P_0$ and $P_2 = (|A_2^{(x)}|^2 + |A_2^{(y)}|^2)P_0$ of the guided light fields of nanofibers 1 and 2, respectively, as functions of the propagation distance z . We plot in figure 11 the results of calculations for the cases where the input field for nanofiber 1 is x -polarized, y -polarized, or circularly polarized, and the input field for nanofiber 2 is zero.

We observe from the figure that, in the cases where the input light is quasilinearly polarized along the principal axis x (see figure 11(a)) or y (see figure 11(b)), the powers P_1 (solid red lines) and P_2 (dashed blue lines) vary periodically in space and 100% power transfers occur at integer multiples of the coupling length $L_x = \pi/2|\eta_x| \simeq 3.48 \mu\text{m}$ or $L_y = \pi/2|\eta_y| \simeq 2.73 \mu\text{m}$. It is clear that, in the case of figure 11, where $a = 200$ nm and $d = 0$, we obtain $L_x > L_y$. This feature is a consequence of the fact that, for the parameters of figure 11, we have $|\eta_x| < |\eta_y|$ (see figures 6(a) and 8(a)). It follows from the numerical results for η_p presented in figures 6(a) and 8(a) that we may observe all the three possibilities $L_x < L_y$, $L_x = L_y$, and $L_x > L_y$, depending on the fiber radius a , the light wavelength λ , and the fiber separation distance d .

We see from figure 11(c) that, in the case where the input light is quasicircularly polarized, the spatial dependencies of the powers P_1 and P_2 show the beating of two different harmonic waves with different wavelengths corresponding to the distinct coupling lengths L_x and L_y . Near 100% power transfers occur at specific propagation lengths.

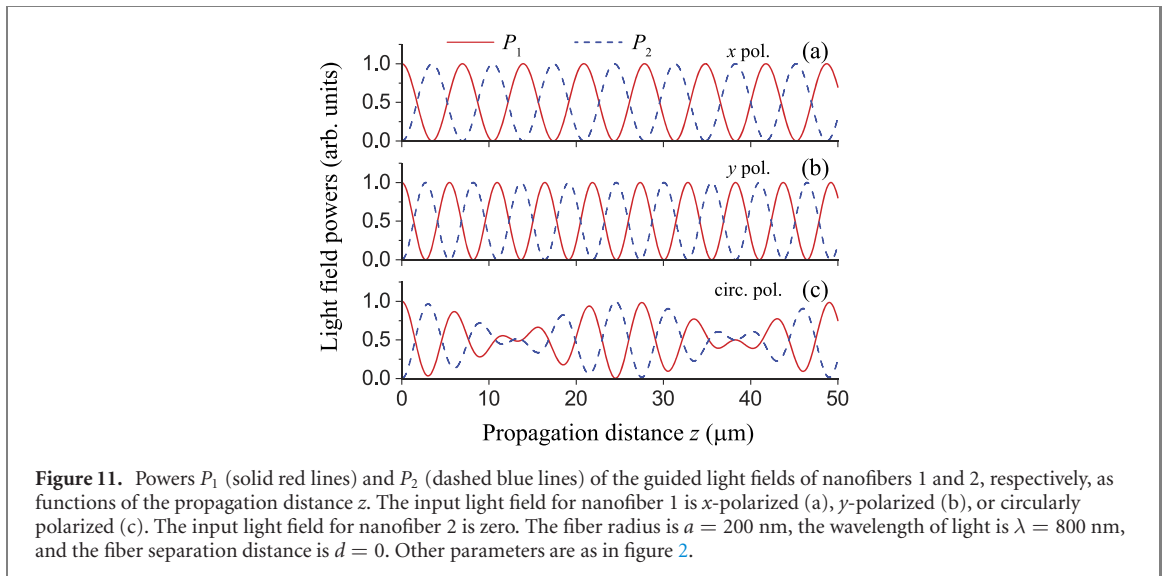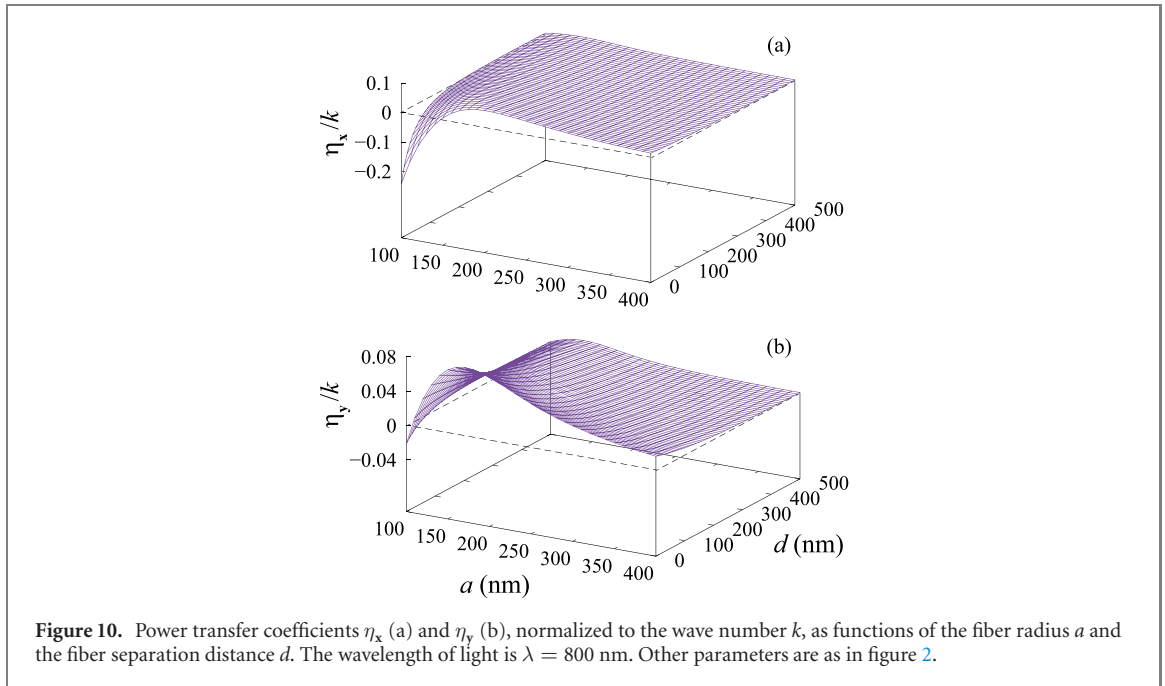

We note that transfer of power between light fields propagating in the guided modes of two parallel waveguides plays a very important role for the construction of practical optical devices, e.g. optical directional couplers, multicore fibers, wavelength-division multiplexers, polarization splitters, power-dependent nonlinear couplers, interferometers, ring resonators, and bistable devices [26–28].

In our calculations for figure 11, we did not consider the radiation losses. Due to the absorption of the fiber material and the imperfections of the fiber surfaces, the guided modes are coupled to the radiation modes. This leads to the radiation losses. It is known that the attenuation length of conventional fibers is on the order of kilometers [26–28]. In the case of nanofibers, the radiation losses are higher, but the transmission is still very high (more than 99% for a nanofiber with length of 2 mm) [2–4]. In the limit of weak coupling, the radiation losses of the coupled fiber system are expected to be of the same order of magnitude as the losses in a single fiber.

5. Summary

In conclusion, we have studied analytically and numerically the coupling between the fundamental guided modes of two identical parallel nanofibers. We have calculated the coefficients of directional coupling, butt coupling, and self coupling as functions of the fiber radius, the light wavelength, and the fiber separation

distance. We have shown that, due to the symmetry of the coupled fiber system, the coupling between two modes with different orthogonal principal quasilinear polarizations, aligned along the radial axis x and the tangential axis y , vanishes. Due to this property, the x - and y -polarized guided modes of a nanofiber are coupled only to the modes with the same corresponding principal polarization of the other nanofiber. We have found that the effects of butt coupling and self coupling on the power transfer are significant when the fiber radius is small (the region $a \lesssim 200$ nm of figures 3 and 6), the light wavelength is large (the region $\lambda \gtrsim 800$ nm of figures 4 and 7), or the fiber separation distance is small (the region $d \lesssim 200$ nm of figures 5 and 8). We have shown that the power transfer coefficient may achieve a local maximum or become zero when the fiber radius, the light wavelength, or the fiber separation distance varies.

We recognize that the effects of difference in radius between nanofibers on the coupling between them were not considered in our paper. For dissimilar fibers, the directional coupling coefficients $\kappa_{12}^{(p_1 p_2)}$ and $\kappa_{21}^{(p_2 p_1)}$ are not related by the complex conjugate relationship [28] and, moreover, one of the fibers can couple efficiently into the other fiber but not conversely [39]. In addition, a difference in radius between nanofibers leads to a difference in propagation constant and hence to a phase mismatch causing a reduction of the power transfer between the coupled nanofibers. The effects of difference in radius between nanofibers on the coupling between them deserve a separate systematic research.

We emphasize that our results are valid only in the framework of the coupled mode theory. The validity of the coupled mode theory for two coupled nanofibers in the case of a small fiber separation with a small fiber radius or a large light wavelength should be investigated further.

Our results are important for controlling and manipulating guided fields of coupled parallel nanofibers and also have relevance in relation to nanofiber coupled ring resonators made from tapered fibers. They can be envisioned to have significant influence on ongoing and future experiments in nanofiber quantum optics and nanophotonics. Due to the small sizes and the high coupling efficiencies, coupled parallel nanofibers could be used as miniaturized Sagnac interferometers [35, 55] and Fabry–Perot resonators in photonic circuits [35]. They can also be extended to be used with emitters and scatterers.

Acknowledgments

This work was supported by the Okinawa Institute of Science and Technology Graduate University.

Appendix A. Mode functions

According to [26–28, 47–49], the mode functions of x - and y -polarized forward-propagating fundamental modes are given as

$$\begin{aligned}\mathcal{E}_j^{(x)} &= \sqrt{2}[\hat{\mathbf{r}}_j e_r(r_j) \cos \varphi_j + i \hat{\boldsymbol{\varphi}}_j e_\varphi(r_j) \sin \varphi_j + \hat{\mathbf{z}}_j e_z(r_j) \cos \varphi_j], \\ \mathcal{H}_j^{(x)} &= \sqrt{2}[i \hat{\mathbf{r}}_j h_r(r_j) \sin \varphi_j + \hat{\boldsymbol{\varphi}}_j h_\varphi(r_j) \cos \varphi_j + i \hat{\mathbf{z}}_j h_z(r_j) \sin \varphi_j],\end{aligned}\quad (\text{A.1})$$

and

$$\begin{aligned}\mathcal{E}_j^{(y)} &= \sqrt{2}[\hat{\mathbf{r}}_j e_r(r_j) \sin \varphi_j - i \hat{\boldsymbol{\varphi}}_j e_\varphi(r_j) \cos \varphi_j + \hat{\mathbf{z}}_j e_z(r_j) \sin \varphi_j], \\ \mathcal{H}_j^{(y)} &= \sqrt{2}[-i \hat{\mathbf{r}}_j h_r(r_j) \cos \varphi_j + \hat{\boldsymbol{\varphi}}_j h_\varphi(r_j) \sin \varphi_j - i \hat{\mathbf{z}}_j h_z(r_j) \cos \varphi_j],\end{aligned}\quad (\text{A.2})$$

where e_r , e_φ , and e_z are the cylindrical components of quasicircularly forward-propagating fundamental modes. It follows from equations (A.1) and (A.2) that the Cartesian components of the mode functions are

$$\begin{aligned}\mathcal{E}_{jx}^{(x)} &= \sqrt{2}[e_r(r_j) \cos^2 \varphi_j - i e_\varphi(r_j) \sin^2 \varphi_j], \\ \mathcal{E}_{jy}^{(x)} &= \sqrt{2}[e_r(r_j) + i e_\varphi(r_j)] \sin \varphi_j \cos \varphi_j, \\ \mathcal{E}_{jz}^{(x)} &= \sqrt{2} e_z(r_j) \cos \varphi_j, \\ \mathcal{H}_{jx}^{(x)} &= \sqrt{2}[i h_r(r_j) - h_\varphi(r_j)] \sin \varphi_j \cos \varphi_j, \\ \mathcal{H}_{jy}^{(x)} &= \sqrt{2}[i h_r(r_j) \sin^2 \varphi_j + h_\varphi(r_j) \cos^2 \varphi_j], \\ \mathcal{H}_{jz}^{(x)} &= \sqrt{2} i h_z(r_j) \sin \varphi_j,\end{aligned}\quad (\text{A.3})$$

and

$$\begin{aligned}
 \mathcal{E}_{jx}^{(y)} &= \sqrt{2}[e_r(r_j) + ie_\varphi(r_j)] \sin \varphi_j \cos \varphi_j, \\
 \mathcal{E}_{jy}^{(y)} &= \sqrt{2}[e_r(r_j)\sin^2 \varphi_j - ie_\varphi(r_j)\cos^2 \varphi_j], \\
 \mathcal{E}_{jz}^{(y)} &= \sqrt{2}e_z(r_j) \sin \varphi_j, \\
 \mathcal{H}_{jx}^{(y)} &= \sqrt{2}[-ih_r(r_j)\cos^2 \varphi_j - h_\varphi(r_j)\sin^2 \varphi_j], \\
 \mathcal{H}_{jy}^{(y)} &= \sqrt{2}[-ih_r(r_j) + h_\varphi(r_j)] \sin \varphi_j \cos \varphi_j, \\
 \mathcal{H}_{jz}^{(y)} &= -\sqrt{2} ih_z(r_j) \cos \varphi_j.
 \end{aligned} \tag{A.4}$$

ORCID iDs

Fam Le Kien  <https://orcid.org/0000-0002-3463-6053>

Sîle Nic Chormaic  <https://orcid.org/0000-0003-4276-2014>

References

- [1] Tong L, Gattass R R, Ashcom J B, He S, Lou J, Shen M, Maxwell I and Mazur E 2003 *Nature* **426** 816
- [2] Nieddu T, Gokhroo V and Nic Shormaic S 2016 *J. Opt.* **18** 053001
- [3] Solano P, Grover J A, Hoffman J E, Ravets S, Fatemi F K, Orozco L A and Rolston S L 2017 *Adv. At. Mol. Opt. Phys.* **66** 439
- [4] Nayak K P, Sadgrove M, Yalla R, Kien F L and Hakuta K 2018 *J. Opt.* **20** 073001
- [5] Samutpraphoot P, Dordevic T, Ocola P L, Bernien H, Senko C, Vuletic V and Lukin M D 2020 *Phys. Rev. Lett.* **124** 063602
- [6] Vahala K J 2003 *Nature* **424** 839
- [7] Wu Y, Ward J M and Nic Chormaic S 2010 *J. Appl. Phys.* **107** 033103
- [8] Li Y and Tong L 2008 *Opt. Lett.* **33** 303
- [9] Lou J, Wang Y and Tong L 2014 *Sensors* **14** 5823
- [10] Zhu J, Ozdemir Ş K and Yang L 2011 *IEEE Photon. Technol. Lett.* **23** 1346
- [11] Tkachenko G, Toftul I, Esporlas C, Maimaiti A, Kien F L, Truong V G and Nic Chormaic S 2020 *Optica* **7** 59
- [12] Balykin V I, Hakuta K, Kien F L, Liang J Q and Morinaga M 2004 *Phys. Rev. A* **70** 011401(R)
- [13] Kien F L, Balykin V I and Hakuta K 2004 *Phys. Rev. A* **70** 063403
- [14] Vetsch E, Reitz D, Sagué G, Schmidt R, Dawkins S T and Rauschenbeutel A 2010 *Phys. Rev. Lett.* **104** 203603
- [15] Goban A, Choi K S, Alton D J, Ding D, Lacroûte C, Pototschnig M, Thiele T, Stern N P and Kimble H J 2012 *Phys. Rev. Lett.* **109** 033603
- [16] Kien F L, Dutta Gupta S, Balykin V I and Hakuta K 2005 *Phys. Rev. A* **72** 032509
- [17] Nayak K P, Melentiev P N, Morinaga M, Kien F L, Balykin V I and Hakuta K 2007 *Opt. Express* **15** 5431
- [18] Nayak K P and Hakuta K 2008 *New J. Phys.* **10** 053003
- [19] Kumar R, Gokhroo V, Deasy K, Maimaiti A, Frawley M C, Phelan C and Nic Chormaic S 2015 *New J. Phys.* **17** 013026
- [20] Stourm E, Lepers M, Robert J, Nic Chormaic S, Mølmer K and Brion E 2020 *Phys. Rev. A* **101** 052508
- [21] Kien F L, Balykin V I and Hakuta K 2006 *Phys. Rev. A* **73** 013819
- [22] Sague G, Vetsch E, Alt W, Meschede D and Rauschenbeutel A 2007 *Phys. Rev. Lett.* **99** 163602
- [23] Rajasree K S, Ray T, Karlsson K, Everett J L and Nic Chormaic S 2020 *Phys. Rev. Res.* **2** 012038
- [24] Kien F L, Ray T, Nieddu T, Busch T and Nic Chormaic S 2018 *Phys. Rev. A* **97** 013821
- [25] Ray T, Gupta R K, Gokhroo V, Everett J L, Nieddu T, Rajasree K S and Nic Chormaic S 2020 *New J. Phys.* **22** 062001
- [26] Snyder A W and Love J D 1983 *Optical Waveguide Theory* (London: Chapman and Hall)
- [27] Marcuse D 1989 *Light Transmission Optics* (Malabar, FL: Krieger)
- [28] Okamoto K 2006 *Fundamentals of Optical Waveguides* (New York: Elsevier)
- [29] Tamir T, Griffel G and Bertoni H L 2013 *Guided-Wave Optoelectronics: Device Characterization, Analysis, and Design* (New York: Springer)
- [30] Sumetsky M 2004 *Opt. Express* **12** 2303
- [31] Jiang X, Tong L, Vienne G, Guo X, Tsao A, Yang Q and Yang D 2006 *Appl. Phys. Lett.* **88** 223501
- [32] Sumetsky M 2008 *J. Lightwave Technol.* **26** 21
- [33] Zeng X, Wu Y, Hou C, Bai J and Yang G 2009 *Opt. Commun.* **282** 3817
- [34] Pal S S, Mondal S K, Tiwari U, Swamy P V G, Kumar M, Singh N, Bajpai P P and Kapur P 2011 *Rev. Sci. Instrum.* **82** 095107
- [35] Ding C, Loo V, Pigeon S, Gautier R, Joos M, Wu E, Giacobino E, Bramati A and Glorieux Q 2019 *New J. Phys.* **21** 073060
- [36] Schelkunoff S A 1955 *Bell Syst. Tech. J.* **34** 995
- [37] Marcuse D 1971 *Bell Syst. Tech. J.* **50** 1791
- [38] Snyder A W 1972 *J. Opt. Soc. Am.* **62** 1267
- [39] Hardy A and Streifer W 1985 *J. Lightwave Technol.* **3** 1135
- [40] Chuang S-L 1987 *J. Lightwave Technol.* **5** 5
- [41] Huang W P and Haus H A 1990 *J. Lightwave Technol.* **8** 922
- [42] Haus H A and Huang W 1991 *Proc. IEEE* **79** 1505
- [43] Huang W-P 1994 *J. Opt. Soc. Am. A* **11** 963
- [44] Chremmos I D, Uzunoglu N K and Kakarantzas G 2006 *J. Lightwave Technol.* **24** 3779
- [45] Frawley M C, Petcu-Colan A, Truong V G and Nic Chormaic S 2012 *Opt. Commun.* **285** 4648
- [46] Jung Y, Harrington K, Yerolatsitis S, Richardson D J and Birks T A 2020 *Opt. Express* **28** 19126

- [47] Tong L, Lou J and Mazur E 2004 *Opt. Express* **12** 1025
- [48] Kien F L, Liang J Q, Hakuta K and Balykin V I 2004 *Opt. Commun.* **242** 445
- [49] Kien F L, Busch T, Truong V G and Nic Chormaic S 2017 *Phys. Rev. A* **96** 023835
- [50] Malitson I H 1965 *J. Opt. Soc. Am.* **55** 1205
- [51] Ghosh G 1997 *Handbook of Thermo-Optic Coefficients of Optical Materials with Applications* (New York: Academic)
- [52] Huang H S and Chang H-C 1989 *Opt. Lett.* **14** 90
- [53] The numerical results presented in [35] are not accurate due to several issues related to the code.
- [54] Tsang L and Chuang S-L 1988 *J. Lightwave Technol.* **6** 304
- [55] Ma K, Zhang Y, Wu Y, Su H, Zhang X and Yuan P 2017 *J. Opt. Soc. Am. B* **34** 2400